

CAMSO SKS 786S

FORMERLY SOLIDEAL SAFETYMASTER SM



SKID STEER
LOADERS



SOLID HARD SURFACE DURABILITY

The ideal solid tire solution for flat-free, hard-surface operation on skid steer loaders. Built to maximize tire life while providing excellent stability for primarily indoor, hard-surface operations.

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



CAMSO

ROAD
FREE
COMPANY

CAMSO SKS 786S



FULL SOLID CONSTRUCTION

- Provides excellent durability and flat-free operation


FULL-WIDTH FOOTPRINT

- Provides excellent stability and tread life

REUSABLE WHEEL

- Provides lower cost per hour and quicker installation

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS			HEEL		LOAD CAPACITY [kg] [lb]						
							Counterbalanced lift trucks			Other vehicles			Static
		O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]	Normal	Quick	Load wheel		Steering wheel	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	
							15 km/h 9 mph	25 km/h 16 mph					25 km/h 16 mph
31x10-20 (10-16.5)	7.50	781	237	33	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42	-	■	-	8885	6835	8900	8100	6850	10350
33x12-20 (12-16.5)	7.50	831	287	40	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	-	■	-	11465	8820	11500	10400	8850	13350
36x14-20 (14-17.5)	7.50	909	326	43	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.8	54	-	■	-	13650	10500	13650	12350	10500	15850

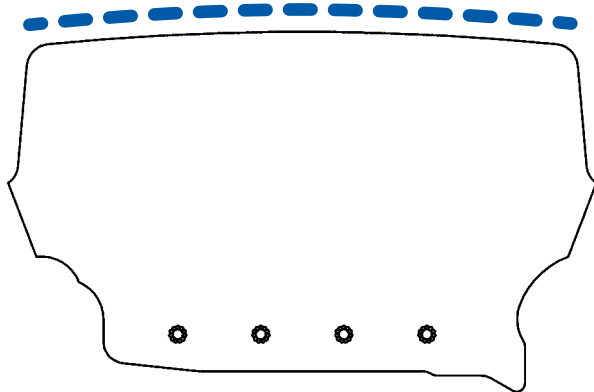

The Camso SKS 786S is a full-sized solid skid steer tire solution that maintains original equipment dimensions with a full, flat-tread profile for **improved stability and longevity** on hard surface applications. Embedded steel bead cables prevent tire spinning on the reusable wheel.

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL